

DECESPUGLIATORI A BRACCIO IDRAULICO "DRAGON"



HYDRAULIC ARM BUSH CUTTERS

IMPIEGO: adatta per la pulizia di fossi, canali, banchine stradali, ecc.

USE: to clean ditches, canals, road banks, etc.


DOTAZIONE DI SERIE:

- DISPOSITIVO ANTIURTO CON BIELLA OSCILLANTE
- sistema autolivellante della testata.
- comandi a distanza con cavi teleflessibili.
- doppio senso di rotazione del rotore.
- motore e pompa gruppo 3.
- protezioni di sicurezza.

STANDARD EQUIPMENT:

- SHOCKPROOF DEVICE WITH OSCILLATING CONNECTION ROD
- Self-levelling head system.
- Remote control with flexible cables.
- Forward-reverse rotor turning direction.
- Group 3 motor and pump.
- Safety guards.

TRASMISSIONE ROTAZIONE CON CINGHIE BELT ROTATION DRIVE

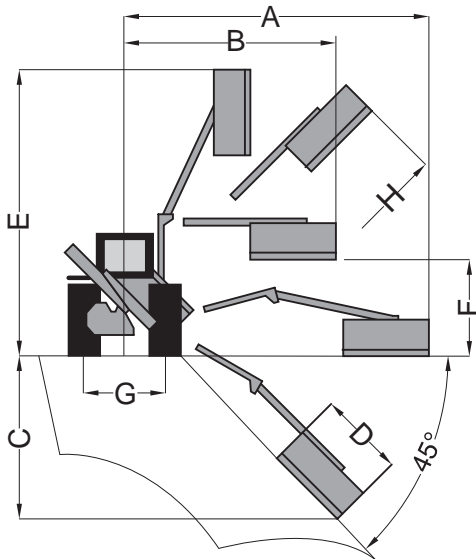

MODELLO MODEL	A	B	C	D	E	F	G	H
	Cm	Cm	Cm	Cm	Cm	Cm	Cm	Cm
D400- 80	386	181	139	80	408	187	160	346
D400- 100	409	204	155	100	431	187	160	395
D400- 125	432	227	172	125	454	187	160	443
D450- 80	434	206	170	80	456	212	160	369
D450- 100	457	229	187	100	479	212	160	418
D450- 125	480	252	203	125	502	212	160	466
D500- 80	482	231	200	80	504	237	160	392
D500- 100	505	254	217	100	527	237	160	441
D500- 125	528	277	233	125	550	237	160	489

MODELLO MODEL		Peso min. Trattrice Min. tractor weight	Presenza di forza PTO						
	Kg	Kg	giri/1' Rpm	n°	n°	n°	n°	n°	n°
D400- 80	645	1800	540	24	12	12	24	24+12	12
D400- 100	675	1800	540	32	16	16	32	32+16	16
D400- 125	705	1800	540	40	20	20	40	40+20	20
D450- 80	665	1800	540	24	12	12	24	24+12	12
D450- 100	695	1800	540	32	16	16	32	32+16	16
D450- 125	725	1800	540	40	20	20	40	40+20	20
D500- 80	685	2000	540	24	12	12	24	24+12	12
D500- 100	715	2000	540	32	16	16	32	32+16	16
D500- 125	745	2000	540	40	20	20	40	40+20	20
D560- 100	740	2200	540	32	16	16	32	32+16	16
D560- 125	740	2200	540	40	20	20	40	40+20	20

MODELLO <i>MODEL</i>		PREZZO <i>PRICE</i>
DRAGON D400	(senza testata - <i>without head</i>)	Cod. DRAGOND400
DRAGON D450	(senza testata - <i>without head</i>)	Cod. DRAGOND450
DRAGON D500	(senza testata - <i>without head</i>)	Cod. DRAGOND500
DRAGON D560	(senza testata - <i>without head</i>)	Cod. DRAGOND560

TESTATA / HEAD	
Testata T 80 con coltelli tipo "CP"- "A"- "D" - <i>T 80 head with "CP"- "A"- "D" type cutters</i>	Cod. DT80CPAD
Testata T 80 con coltelli tipo "M" / "S" - <i>T 80 head with "M" / "S" type cutters</i>	Cod. DT80MS
Testata T 80 con coltelli tipo "Z" - <i>T 80 head with "Z" type cutters</i>	Cod. DT80Z
Testata T 100 con coltelli tipo "CP" / "A" / "D" - <i>T 100 head with "CP" / "A" / "D" type cutters</i>	Cod. DT100CPAD
Testata T 100 con coltelli tipo "M" / "S" - <i>T 100 head with "M" / "S" type cutters</i>	Cod. DT100MS
Testata T 100 con coltelli tipo "Z" - <i>T 100 head with "Z" type cutters</i>	Cod. DT100Z
Testata T 125 con coltelli tipo "CP" / "A" / "D" - <i>T 125 head with "CP" / "A" / "D" type cutters</i>	Cod. DT125CPAD
Testata T 125 con coltelli tipo "M" / "S" - <i>T 125 head with "M" / "S" type cutters</i>	Cod. DT125MS
Testata T 125 con coltelli tipo "Z" - <i>T 125 head with "Z" type cutters</i>	Cod. DT125Z

ACCESSORI / ACCESSORIES	
Tenditori a vite - <i>Screw coupling</i>	Cod. DTV
Scambiatore di calore con elettrovalvola automatica - <i>Heat exchanger with automatic electric fan</i>	Cod. DSC
Accumulatore oleopneumatico - <i>Hydropneumatic accumulator</i>	Cod. DAO
Barra siepi 163 cm (ø max di taglio 2 cm) - <i>Hedge bar: 163 cm (max cutting ø: 2 cm)</i>	Cod. DBS163
Cardano - <i>Cardan joint</i>	Cod. DC
Kit attacco tenditori 3° punto - <i>Stretcher 3rd point hitch kit</i>	Cod. DAT3P

